




ENGLISH BRAIDS

PERFORMANCE
YACHT ROPES

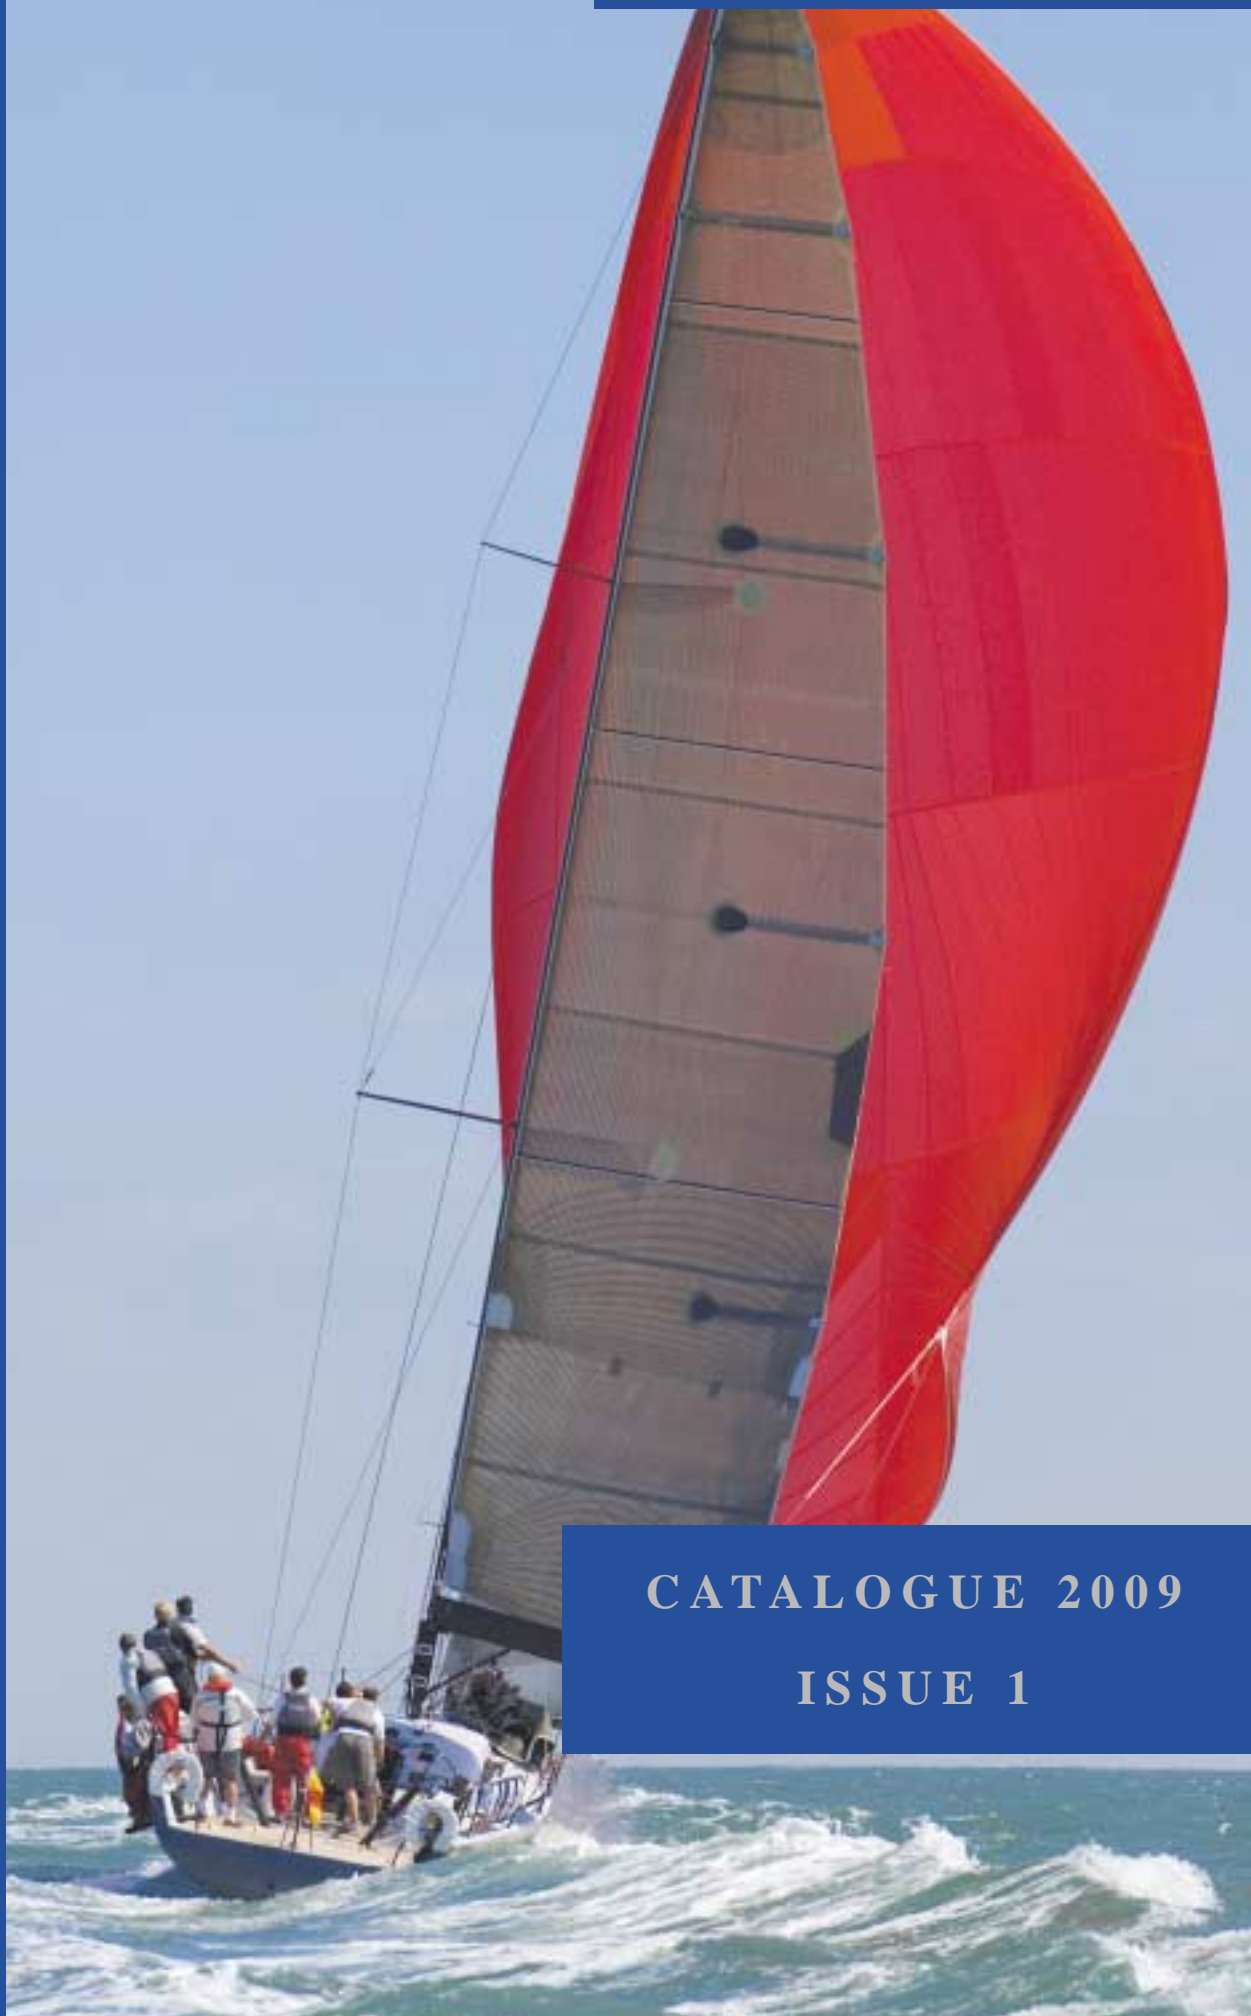

CATALOGUE 2009

ISSUE 1

ENGLISH BRAIDS LTD.,
SPRING LANE, MALVERN,
WORCESTERSHIRE.

WR14 1AL

Tel: +44 (0) 1684 892222

Fax: +44 (0) 1684 892111

Email: Info@englishbraids.com

www.englishbraids.com



SUPER BRAID ON BRAID

Now up-rated for improved performance, Braid on Braid remains the first choice for polyester halyards and sheets. Pre-stretched, yet easily spliceable, Braid on Braid resists kinking and maintains flexibility in all conditions.

Ref	Dia	Reel Length	White Solid	Red fleck	Blue fleck	Green fleck	Yellow fleck	Breaking Load
R60P	6mm	200m	✓	✓	✓	✓	-	1230Kgs
R80P	8mm	200m	✓	✓	✓	✓	✓	2000Kgs
R100P	10mm	200m	✓	✓	✓	✓	✓	2550Kgs
R120P	12mm	100m	✓	✓	✓	✓	✓	4000Kgs
R140P	14mm	100m	✓	✓	✓	-	-	6000Kgs
R160P	16mm	100m	✓	✓	✓	✓	-	7250Kgs
R180P	18mm	100m	-	✓	✓	-	-	7500Kgs
R200P	20mm	100m	-	✓	-	-	-	11250Kgs
R240P	24mm	100m	-	✓	-	-	-	14000Kgs



Ref	Dia	Reel Length	Purple green fleck	Dark Green	Green blue fleck	Yellow blue fleck	Red blue fleck	Blue red fleck	Navy Blue solid	Beige or Black solid	Breaking Load
R60P	6mm	200m	✓	✓	-	✓	✓	✓	-	-	1230Kgs
R80P	8mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	2000Kgs
R100P	10mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	2550Kgs
R120P	12mm	100m	✓	✓	✓	✓	✓	✓	✓	✓	4000Kgs
R140P	14mm	100m	-	-	✓	✓	-	-	✓	✓	6000Kgs
R160P	16mm	100m	-	-	-	-	-	-	✓	-	7250Kgs



RACING DYNEEMA *

Further developments to our 12 strand Dyneema core processing give these Dyneema ropes improved stability. The strength to weight ratio is also improved whilst the premium properties of low stretch, low weight and superb durability make this the first choice racing halyard rope. Colour range is extended to include bright pink and dark green.

Ref	Dia	Reel Length	White with marker	Solid white	Red	Blue	Neon yellow	Black	Dark green	Navy	Breaking Load
DS60	6mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	1800Kgs
DS80	8mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	3200Kgs
DS100	10mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	4200Kgs
DS120	12mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	5700Kgs
DS140	14mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	7800Kgs
DS160	16mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	12000Kgs
DS180	18mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	15000Kgs
DS200	20mm	200m	✓	✓	✓	✓	✓	✓	✓	✓	17000Kgs
DS240	24mm	200m	Price on application		16-24mm made to order						



Dual Core Dyneema, Navy blue outer, 8mm with twin 4mm cores 100m reels
£288.09 per 100m



Race taper 6mm to 4mm red, blue and black 100m reels
£125.11 per 100m



DYNEEMA * CRUISING

The cruising yachtsman's best buy halyard rope. Combines the performance of Dyneema fibre core with a tough hard wearing polyester cover. These ropes are designed to replace all polyester halyards size for size so no need to revise the hardware. Dyneema Cruising has less stretch than a pre-stretched polyester halyard, is spliceable and is as durable as all polyester ropes representing great value for money.

Ref	Dia	Reel Length	Red and white	Blue and white	Orange and white	Purple and white	Black and blue	Black and grey	Breaking Load
DSC60	14mm	200m	✓	✓	✓	✓	-	-	4400Kgs
DSC80	8mm	200m	✓	✓	✓	✓	-	-	2000Kgs
DSC100	10mm	200m	✓	✓	-	-	✓	✓	2500Kgs
DSC120	12mm	200m	✓	✓	-	-	✓	✓	3500Kgs



DINGHY DYNEEMA *

Fine Dyneema lines in sizes for spinnaker flying and dinghy control lines.

Ultimate performance from the latest fibre. Pre-stretched and treated cores, with colour markers for identification after cover stripping. These highly developed halyard ropes have high strength to weight ratio, low stretch and low weight with superb durability

Ref	Dia	Reel Length	Black & White	White	Red	Blue	Neon yellow	Black	Dark green	Fluorescent pink	Breaking Load
DS10	1mm	200m	-	√	-	-	-	-	-	-	70Kgs
DS15	1.5mm	200m	√	-	-	-	-	-	-	-	110Kgs
DS20	2mm	200m	-	√	√	-	√	-	-	-	280Kgs
DS30	3mm	200m	-	√	√	√	√	√	√	√	450Kgs
DS40	4mm	200m	-	√	√	√	√	√	√	√	700Kgs
DS50	5mm	200m	-	√	√	√	√	√	√	√	1300Kgs



DYNEEMA LITE *

Ultra light ropes with a Dyneema SK75 core and UV stabilised high tenacity polypropylene cover. Bright colours for instant recognition

Ref	Dia	Reel Length	Black yellow fleck	Yellow blue fleck	Pink blue fleck	Blue fuschia fleck	Breaking Load
DL60	6mm	200m	√	-	-	-	500Kgs
DL70	7mm	200m	-	√	-	-	900Kgs
DL80	8mm	200m	-	-	√	-	1800Kgs
DL90	9mm	200m	-	-	-	√	2200Kgs



DYNAMIC LINE *

Dyneema SK75 performance, pre-stretched and treated for minimum stretch, maximum strength and good durability. Ultimate racing control lines and fly lines with colour identification

Ref	Dia	Reel Length	Grey	Breaking Load
DC20	2mm	200m	√	900Kgs
DC30	3mm	200m	√	1020Kgs
DC40	4mm	200m	√	2050Kgs
DC50	5mm	200m	√	2700Kgs
DC60	6mm	200m	√	3020Kgs

*Dyneema is the registered trade-mark of DSM High Performance Fibres



VECTRAN *

Vectran fibre is spun from a liquid crystal polymer. The performance is impressive, halyards exhibit no stretch or creep at working loads.

Ref	Dia	Reel Length	Red	Green	Black	Breaking Load
V30	3mm	100m	-	-	√	780Kgs
V40	4mm	100m	√	-	-	1010Kgs
V60	6mm	100m	√	√	√	1610Kgs
V80	8mm	100m	√	√	√	3000Kgs
V100	10mm	100m	√	√	√	4500Kgs
V120	12mm	100m	√	√	√	6500Kgs

*Vectran is the registered trade-mark of Celanese Acetate



VECTRAN MINI LINES *

Control lines and halyards for high performance racing dinghies.

Ref	Dia	Reel Length	Navy Blue white fleck	Breaking Load
VM1.4	1.4mm	50m	√	780Kgs
VM30	3mm	16m	√	1010Kgs
VM40	4mm	12m	√	1610Kgs

*Vectran is the registered trade-mark of Celanese Acetate



VECTRAN V12 ULTIMATE *

Vectran braided lines, stretch set and coated for ultimate rigidity. These lines are spliceable.

Ref	Dia	Reel Length	Natural Vectran/ purple fleck	Natural Vectran	Breaking Load
V25	2.5mm	100/200m	√	-	596Kgs
V30	3mm	100/200m	√	-	935Kgs
V40	4mm	100/200m	√	-	1668Kgs
V50	5mm	100/200m	-	√	2084Kgs
V60	6mm	100/200m	-	√	2918Kgs

*Vectran is the registered trade-mark of Celanese Acetate



EBRAID 3

All polyester sheet and halyard ropes with hard wearing cover over pre-stretched three strand core.

Ref	Dia	Reel Length	Solid white	Solid Beige	Breaking Load
EB80	8mm	200m	√	√	1900Kgs
EB100	10mm	200m	√	√	2800Kgs
EB120	12mm	200m	√	√	3650Kgs
EB140	14mm	200m	√	√	5100Kgs



EBRAID 12

100% polyester with hard wearing braided cover over a 12 strand core, this rope is pre-stretched and splices easily.

Ref	Dia	Reel Length	Solid white	Red fleck	Blue fleck	Green fleck	Yellow fleck	Breaking Load
SB80	8mm	200m	√	√	√	√	√	1600Kgs
SB100	10mm	200m	√	√	√	√	√	2500Kgs
SB120	12mm	200m	√	√	√	√	√	3500Kgs
SB140	14mm	200m	√	√	√	√	√	4800Kgs



SPRINTLINE 16 PLAIT PRE-STRETCHED POLYESTER

Combining superb handling with strength, the pre-stretching process ensures optimum control for halyards. Specially designed for the dinghy sailor. Sprintline is also ideal for control lines, leach lines, outhauls, lanyards and sailboards. Bright colours with contrasting flecks mean easy identification in use.

Dia	Reel Length	Black	Red	Navy blue	Yellow	Purple	Pink	Blue	Orange	Breaking Load
3mm	100m	√	√	√	√	√	√	√	√	180Kgs
4mm	100m	√	√	√	√	√	√	√	√	230Kgs
5mm	100m	√	√	√	√	√	√	√	√	600Kgs
6mm	100m	√	√	√	√	√	√	√	√	750Kgs



16 PLAIT MATT POLYESTER

Top quality cruising sheet that combines the strength of a polyester core with the soft, good handling characteristics of a matt polyester outer sheath. Suitable for sheets and halyard tails.

Ref	Dia	Reel Length	White blue fleck	Red	Blue	Black	Breaking Load
S60	6mm	100m	√	-	-	-	600Kgs
S80	8mm	100m	√	√	√	√	1460Kgs
S100	10mm	100m	√	√	√	√	1580Kgs
S120	12mm	100m	√	√	√	√	3400Kgs
S140	14mm	100m	√	√	√	-	4350Kgs
S160	16mm	100m	√	-	-	-	5100Kgs



8 PLAIT MATT POLYESTER

Suitable for dinghy spinnaker sheets and control lines for both the racing and pleasure dinghy sailor. A range of colours for ease of identification, the white rope contains a blue fleck.

Ref	Dia	Reel Length	White blue fleck	Red blue fleck	Blue	Black	Buff	Breaking Load
SK30	3mm	100m	-	-	-	-	√	90Kgs
SK40	4mm	100m	√	√	√	-	√	170Kgs
SK50	5mm	100m	√	-	-	-	√	230Kgs
SK50	5mm	300m	√	√	√	√	√	230Kgs
SK60	6mm	100m	√	√	√	√	-	450Kgs
SK60	6mm	300m	√	-	-	-	-	450Kgs
SK80	8mm	200m	√	-	-	-	-	850Kgs
SK100	10mm	100m	√	-	-	-	-	980Kgs



8 PLAIT PRE-STRETCHED POLYESTER

An 8 plait construction prevents twisting and kinking and is hard wearing. The extensive range of colours with contrasting flecks are ideal for halyards where very low stretch is required.

Ref	Dia	Reel Length	White orange fleck	Multicoloured (orange)	Red	Blue	Breaking Load
K30P	3mm	300m	√	-	-	-	240Kgs
K40P	4mm	100m	√	-	-	-	450Kgs
K40P	4mm	300m	√	√	√	√	450Kgs
K50P	5mm	100m	√	-	-	-	630Kgs
K50P	5mm	300m	√	-	√	√	630Kgs
K60P	6mm	100m	√	-	-	-	710Kgs
K60P	6mm	300m	√	-	-	-	710Kgs
K80P	8mm	200m	√	-	-	-	1000Kgs
K100P	10mm	100m	√	-	-	-	1700Kgs



3 STRAND PRE-STRETCHED POLYESTER

Exhibits the same properties as standard polyester, but heat setting and pre-stretching gives the rope a very low stretch factor, whilst retaining flexibility and handling qualities. Easy to splice, it's suitable for use as halyards or in any situation where tension is constant. Ropes contain contrasting flecks.

Dia	Reel Length	White	Beige hard lay	Breaking Load
3mm	300m	✓	-	310Kgs
4mm	100m/300m(white only)	✓	-	580Kgs
5mm	100m/300m(white only)	✓	-	690Kgs
6mm	100m/300m(white only)	✓	-	1020Kgs
7mm	100m	✓	-	1200Kgs
8mm	100m	✓	✓	1800Kgs
10mm	220m	✓	✓	2750Kgs
12mm	165m	✓	✓	3350Kgs
12mm	220m	-	✓	3350Kgs
14mm	220m	-	✓	4200Kgs
16mm	220m	-	✓	5700Kgs
18mm	220m	-	✓	7000Kgs
20mm	220m	-	✓	8000Kgs
24mm	220m	-	✓	11750Kgs



FLAIR

Polypropylene dinghy sheet line

Brightly coloured floating line designed specifically for the pleasure dinghy market.

Dia	Reel Length	Red with Blue and Yellow flecks	Blue with Yellow and Red flecks	Breaking Load
7mm	200m	✓	✓	830Kgs
9mm	200m	✓	✓	950Kgs



8 PLAIT MULTIFILAMENT POLYPROPYLENE

Light-weight floating sheet rope available in bright colours with contrasting fleck. Suitable for use in light winds. Very soft and flexible.

Ref	Dia	Reel Length	White	Red	Blue	Yellow	Black	Orange	Breaking Load
PK20	2mm	1000m	✓	-	-	-	-	-	50Kgs
PK30	3mm	300m	✓	-	-	-	-	-	130Kgs
PK40	4mm	200m	✓	-	-	-	✓	✓	275Kgs
PK50	5mm	300m	✓	-	-	-	-	-	440Kgs
PK60	6mm	300m	✓	✓	✓	✓	✓	✓	560Kgs
PK80	8mm	200m	✓	✓	✓	✓	✓	✓	1060Kgs
PK100	10mm	200m	✓	✓	✓	✓	✓	✓	1400Kgs



3 STRAND POLYESTER BUFF

Good handling with a natural look for traditional boats. Three strand polyester buff coloured has reduced stretch for halyard performance.

Dia	Reel Length	Buff	Breaking load
5mm	300m	✓	230Kgs
6mm	300m	✓	550Kgs
8mm	300m	✓	800Kgs
10mm	220m	✓	1500Kgs
12mm	165m	✓	2000Kgs
14mm	110m	✓	3000Kgs
16mm	85m	✓	3800Kgs



SPORTLINE BUFF POLYESTER

Buff coloured braided rope in 100% polyester, soft flexible with a natural look for traditional boats.

Dia	Reel Length	Buff	Breaking load
6mm	200m	✓	590Kgs
8mm	100m	✓	1100Kgs
10mm	100m	✓	2000Kgs
12mm	100m	✓	2600Kgs
14mm	100m	✓	3000Kgs
16mm	100m	✓	4200Kgs



3 STRAND POLYESTER STANDARD

This 3 strand rope is extremely strong and hardwearing, with reasonable shock absorption.

Dia	Reel Length	White	Navy Blue	Black	Beige	Breaking Load
6mm	300m	✓	-	-	-	830Kgs
8mm	300m	✓	✓	-	✓	1700Kgs
10mm	220m	✓	✓	-	✓	2340Kgs
12mm	165m	✓	✓	-	✓	3310Kgs
14mm	110m	✓	✓	✓	✓	4180Kgs
16mm	110m	✓	✓	-	✓	5635Kgs
18mm	55m	✓	-	-	-	6950Kgs
18mm	110m	✓	✓	-	✓*	6950Kgs
20mm	55m	✓	-	-	-	7500Kgs
20mm	110m	✓	✓	-	✓*	7500Kgs
24mm	55m	✓	-	-	-	11000Kgs
24mm (Coils)	100m	✓	✓	✓	✓*	11000Kgs
28mm (Coils)	100m	✓	✓	✓	-	14640Kgs
32mm (Coils)	100m	✓	✓	✓	-	18840Kgs

*Made to order



3 STRAND NYLON

A soft flexible rope. Very strong with good shock absorption properties, hardwearing and very easy to splice. Suitable for use as Anchor or Kedge warps.

Dia	Reel Length	White	Black	Breaking Load
5mm	300m	✓	-	580Kgs
6mm	300m	✓	✓	780Kgs
8mm	300m	✓	✓	1800Kgs
10mm	220m	✓	✓	2800Kgs
12mm	165m	✓	✓	3100Kgs
14mm	110m	✓	✓	4900Kgs
16mm	110m	✓	✓	6100Kgs
18mm	110m	✓	-	7300Kgs
20mm	110m	✓	-	8800Kgs
24mm	110m	✓	-	12800Kgs
28mm (Coils)	220m	✓	-	17100Kgs



3 STRAND POLYESTER MATT FINISH

Hard wearing and easy to coil, it stays soft and flexible in use. Makes superb mooring line. White with red/blue fleck and traditional buff.

Dia	Reel Length	White	Breaking Load
6mm	300m	✓	570Kgs
8mm	300m	✓	1020Kgs
10mm	220m	✓	1590Kgs
12mm	165m	✓	2270Kgs
14mm	110m	✓	3180Kgs
16mm	110m	✓	4100Kgs
18mm	110m	✓	5100Kgs



8 STRAND NYLON ANCHORBRAID

The number one choice for anchor warps due to strength and high-stretch characteristics along with exceptional flexibility and non-kinking. Easily spliced to chain. Anchor braid, the silent anchor warp, no creaks or groans unlike 3 strand.

Dia	Reel Length	White	Black	Navy Blue	Breaking Load
10mm	200m	✓	✓	-	2400Kgs
12mm	200m	✓	✓	-	3000Kgs
14mm	100m	✓	✓	-	3800Kgs
16mm	100m	✓	✓	-	5300Kgs
18mm	100m	✓	✓	-	7400Kgs
20mm	100m	✓	✓	-	8300Kgs
24mm	220m (coils)	✓	-	✓	14370Kgs
28mm	220m (coils)	✓	-	✓	18550Kgs
32mm	220m (coils)	✓	-	✓	23930Kgs



NYLON DOCKLINE

Dia	Reel Length	Black	Breaking Load
24mm	220m	✓	12700Kgs
28mm	220m	✓	17200Kgs
32mm	220m	✓	22000Kgs
36mm	220m	✓	27000Kgs
40mm	220m	✓	36000Kgs
44mm	220m	✓	42000Kgs
48mm	220m	✓	50000Kgs
52mm	220m	✓	60000Kgs

Superyacht Docklines made to customer lengths fitted with factory eye splice on one end.



3 STRAND POLYPROPYLENE

STAPLE SPUN & MONOFILAMENT

Both ropes are strong and floating, hairy staple spun gives good grip and ties easily, monofilament is economical and hard wearing.

Dia	Reel Length	White	Blue	Breaking load
6mm	220m	-	✓	480Kgs
8mm	220m	✓	✓	960Kgs
10mm	220m	✓	✓	1430Kgs
12mm	220m	✓	✓	2030Kgs
14mm	110m	✓	✓	2790Kgs



8 & 16 PLAIT STANDARD POLYESTER

White small stuff in strong polyester for burgee halyards and general use.

Ref	Dia	Reel Length	White	Black	Breaking Load	Ref	Dia	Reel Length	White	Breaking Load
K16	1.6mm	500m	✓	-	53Kgs	R14	1.4mm	1000m	✓	42Kgs
K20	2.0mm	1000m	✓	✓	100Kgs	R16	1.6mm	500m	✓	54Kgs
K25	2.5mm	600m	✓	✓	120Kgs	R18	1.8mm	500m	✓	65Kgs
K28	2.8mm	500m	✓	✓	200Kgs	R20	2.0mm	500m	✓	91Kgs
K35	3.5mm	300m	✓	-	230Kgs	R22	2.2mm	800m	✓	113Kgs
K40	4.0mm	250m	✓	✓	320Kgs	R25	2.5mm	600m	✓	121Kgs
K50	5.0mm	200m	✓	-	400Kgs	R27	2.7mm	500m	✓	207Kgs
K60	6.0mm	200m	✓	-	590Kgs	R32	3.2mm	400m	✓	331Kgs



STARTER CORD

These cords are specially designed to operate with engine recoil systems. White with red fleck.

Ref	Dia	Reel Length	White	Breaking Load
ST30	3.0mm	100m	✓	230Kgs
ST35	3.5mm	100m	✓	300Kgs
ST40	4.0mm	100m	✓	450Kgs
ST45	4.5mm	100m	✓	470Kgs
ST50	5.0mm	100m	✓	510Kgs
ST55	5.5mm	100m	✓	580Kgs
ST60	6.0mm	100m	✓	700Kgs



SHOCK CORDS

Super stretch shock cords made with the finest natural rubber filament cores. Our shock cords have a minimum of 100% stretch for greater durability. Braided covers are white nylon or high tenacity polypropylene colours.

Dia	Reel Length	White	Red	Blue	Yellow	Black	Multi-Coloured
3mm	100m	✓	-	-	-	✓	-
4mm	100m	✓	✓	✓	✓	✓	-
5mm	100m	✓	✓	✓	✓	✓	✓
6mm	100m	✓	✓	✓	✓	✓	-
7mm	100m	✓	-	-	-	-	-
8mm	100m	✓	-	✓	✓	-	-
10mm	100m	✓	-	-	-	-	-
12mm	100m	✓	-	-	-	-	-
Hooks	✓	(Suitable for up to 6mm diameter shock cord)					



SHOCK CORD LOOPS

Shock cord loops with balls and double ball ties for sail tidying.

Dia	Type	Length
5mm	Double Ball Ties White	300mm
5mm	Double Ball Ties White	400mm
5mm	Double Ball Ties White	760mm
5mm	Ball Loops Black	100mm
5mm	Ball Loops Black	150mm
5mm	Ball Loops Black	225mm
5mm	Hook Loops White	100mm
5mm	Hook Loops White	150mm
5mm	Hook Loops White	225mm
8mm	Hook Assembly Black	300mm
8mm	Hook Assembly Black	450mm
8mm	Hook Assembly Black	600mm
8mm	Hook Assembly Black	910mm



FAST LINES

Ready made braided mooring lines with strong factory spliced eye in one end in clear pre-packs with rope guides.

Dia	Length	Solid White	Black or Navy Blue
10mm	8m	✓	✓
12mm	10m	✓	✓
14mm	12m	✓	✓



PULPIT RAIL NETTING

Pulpit and pushpit rail netting. This traditional construction of net is laid up with a 50 mm square knotted mesh giving a 750 mm net width with meshes square. The net is made from high tenacity polyester braided cord with knots tensioned and PU coated for superb stability and durability.

Reel Length

100m

One metre off the reel gives approximately 760 mm of net length with meshes square. In other words add 30% to the pulpit run length for the cutting length from the reel.



WATER SKI LINES

Self splicing floating line.

Reel Length
200m



BARRIER ROPES

Soft braided 25 mm diameter barrier ropes in solid colours with polished brass and chrome fittings. Cutting service available, prices on request.



WEBBLASH

A range of webbing securing straps for surfboards, canoes and boats on roof racks and trailers.

Description	2m	3m	4m	5m	7m	8m
CAM25E (Pair) Endless Web and Cam	-	√	-	√	-	-
RL25E (Each) Endless Web and Ratchet	-	√	-	√	√	-
RL25S (Each) 'S' Hook and Ratchet	√	√	√	√	√	-
RL35H (Each) Open Hook	-	-	-	√	√	-
OCS50 (Each) Overcentre 'S' Hook	-	-	-	-	√	-
OC50E (Each) Overcentre/Endless Web	-	-	-	√	√	-
OC50H (Each) Overcentre/Open Hook	-	-	√	√	√	-
RL50H (Each) Ratchet/Open Hook	-	-	-	√	√	-
RLL50E (Each) Ratchet/Endless Web	-	-	-	√	√	-
RLL50H (Each) Ratchet/Open Hook	-	-	-	√	√	-
50mm Trailer Winch Strap	-	√	√	√	√	√



WEBBLASH CAROUSEL

For retailers a trade package is available which includes a popular range of lashings complete with a counter top or free-standing Display/Dispenser Unit.

Contents	Length	Quantity	Contents	Length	Quantity
CAM25E	3m	3 Pairs	OC50E	7m	2 No
CAM25E	5m	3 Pairs	OC50H	5m	2 No
RL25E	5m	2 No	OC50H	7m	3 No
RL25E	7m	2 No	RLL50H	5m	3 No
RL25S	3m	2 No	RLL50H	7m	2 No
RL25S	7m	2 No	Winchstrap	6m	2 No


The package includes the items listed and display stand.



WEBBLASH - POLYESTER

Very high abrasion resistance and strength ensures performance and reliability, for use as jackstay, toestraps or for securing buoyancy bags.

Lashing Width	Reel Length	Colours	Breaking Load
25mm	50m	Assorted	1200Kgs
50mm	50m	Assorted	2000Kgs
25mm	50m	Loomstate/White	4000Kgs
25mm	50m	Jackstay webblue	2200Kgs
25mm	50m	Jackstay webgold	2200Kgs
25mm	50m	Buoyancy Bag/White	n/a



WEBBLASH - POLYPROPYLENE

Durable and rot proof, this range is ideal for use as battery straps in the marine environment.

Lashing Width	Reel Length	Colours	Breaking Load
18mm	50m	White	n/a
25mm	50m	Solid & Multicolour	200Kgs



WHIPPING TWINE

WAXED POLYESTER

Whipping and serving are still the best way to secure the rope end, essential with dual fibre ropes such as Dyneema and Vectran. Our high tenacity polyester twines are wax impregnated and available in two weights and a range of colours.

Packs contain 10 spools for standard and heavy weight twines in white and colours and three spools in buff waxed spun polyester. Cartons are counter top display items.

Heavy Grade 25 metres per reel
10 reels per box White

Standard Grade 50 metres per reel
10 reels per box White

Standard Grade 50 meters per reel Red, Blue, Green, Black, Navy, Yellow & Mixed
10 reels per box

Heavy Grade buff waxed 40m per reel

HAND HELD HOT KNIFE CUTTER

Cuts by melting through the rope and sealing the core and cover together

Replacement Blade



BENCH CUTTER

For production cutting and sealing cords and ropes

Replacement Blade



SPLICING FIDS

Sets

Single 20mm fid

See www.englishbraids.com for splicing instructions



HANDY PACK RANGE

Point of purchase display carousel with handy reels of quality colourful cords and whipping twine

Carousel with 84 reels

Replacement box with 42 reels



6 BAR RACK



ROPE TECHNICAL DATA SHEETS
Available on request, printed or PDF file

FREE STOCKIST STICKER



PRODUCT INFORMATION GUIDES WITH DISPENSER



4 BAR RACK

ROPE RACKS TO FIT ANY SPACE

All of our rope racks are available to display and dispense ropes free on loan with a rope stock. We can advise on suitable start up stock holding and we offer a flexible approach to meeting the requirements of your yachting customers. Our 4 and 6 bar racks are free standing and need approximately 1.2 metre of width and 0.75 metre depth. English Braids modular rope display system can be designed to meet customers available display space. The system requires secure fixing to a flat vertical surface. We can help design the rope display system to suit your site and stock requirements.

MODULAR RACK 3 WIDE 3 SECTIONS HIGH

MODULAR RACK 3 WIDE VARIOUS HEIGHTS



TRADING TERMS

We have no minimum invoice value. Carriage is free on orders in excess of £800 nett invoiced at list price on mainland UK only.

Payment is strictly 30 days nett. VAT is not included in these prices.

All prices shown are per 100m unless otherwise stated. All goods are sold subject to our standard terms and conditions, copy available on request.

ENGLISH BRAIDS LTD., SPRING LANE, MALVERN, WORCESTERSHIRE WR14 1AL

TO ORDER: Tel +44 (0)1684 892222

www.englishbraids.com

Fax +44 (0)1684 892111

email: info@englishbraids.com